


EASY BADGE[®] 3.0

Printer Specification

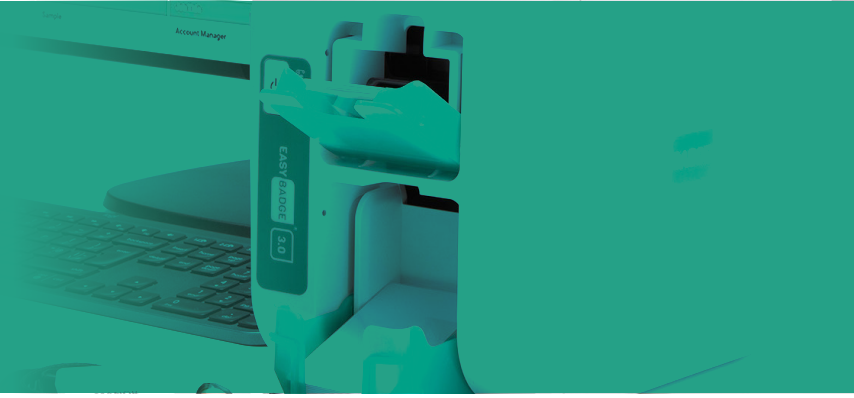

Printing

Print Type	Colour dye sublimation
Printing Process	Monochrome thermal printing
Technology	Rewritable print technology

Card Capacity

Input Hopper	50 input card feeder / hopper
Output Hopper	50 output card stacker / hopper

Print Speed

Single-sided Photo Quality Colour	23 seconds per card / 157 cards per hour
High Speed Quality Colour	18 seconds per card / 200 cards per hour
Monochrome	4.7 seconds per card / 766 cards per hour

Card Types / Thickness

Type	CR80/ CR79 PVC ISO blank cards, rewritable and HoloPatch® cards
Thickness	0.50mm to 1.00mm / 0.020" to 0.040"

Dimensions

Dimensions (L x W x H)	255mm x 208mm x 180mm / 10" x 8.2" x 7"
Weight	2.9kg /6.3lbs

Printer Interfaces

- High Speed USB 2.0, USB 3.0 compatible (Type B)
- 10/100 Ethernet

Power Source

24V DC external power supply

Card Security

A HoloKote® security watermark can be printed onto the card surface and can be activated via the EasyBadge 3.0 printer driver settings.

Operating Environment

We recommend a sheltered office environment at 10°C to 30°C / 50°F to 85°F.

Warranty

3 years limited warranty with direct access to the printer manufacturer technical support team.

Commitment to the Environment

Whether through carbon offset or actively seeking to reduce the individual footprint of devices, our approach is driven by recognition of the importance of environmental issues to consumers worldwide.

The EasyBadge 3.0 printer is manufactured and packaged from over 75% recycled or recyclable material. EasyBadge support One Tree Planted, which sees the company plant a tree for every printer sold.

